



Instructions to connect the gako unguator PRO or gako hardware with the internet

1. Shutdown your device and/or turn it off.
2. Connect your device with the ethernet cable with your local network.
3. Turn on your device and check if your device is connected to the internet via  settings menu and network.

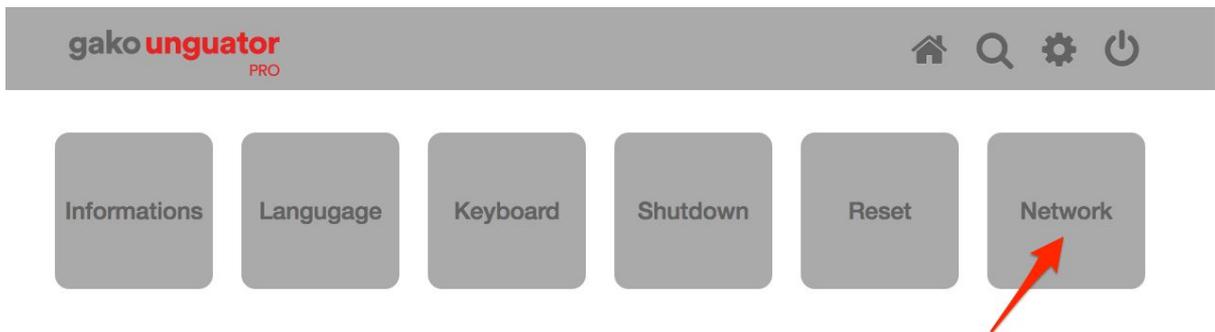

Screen setting menu

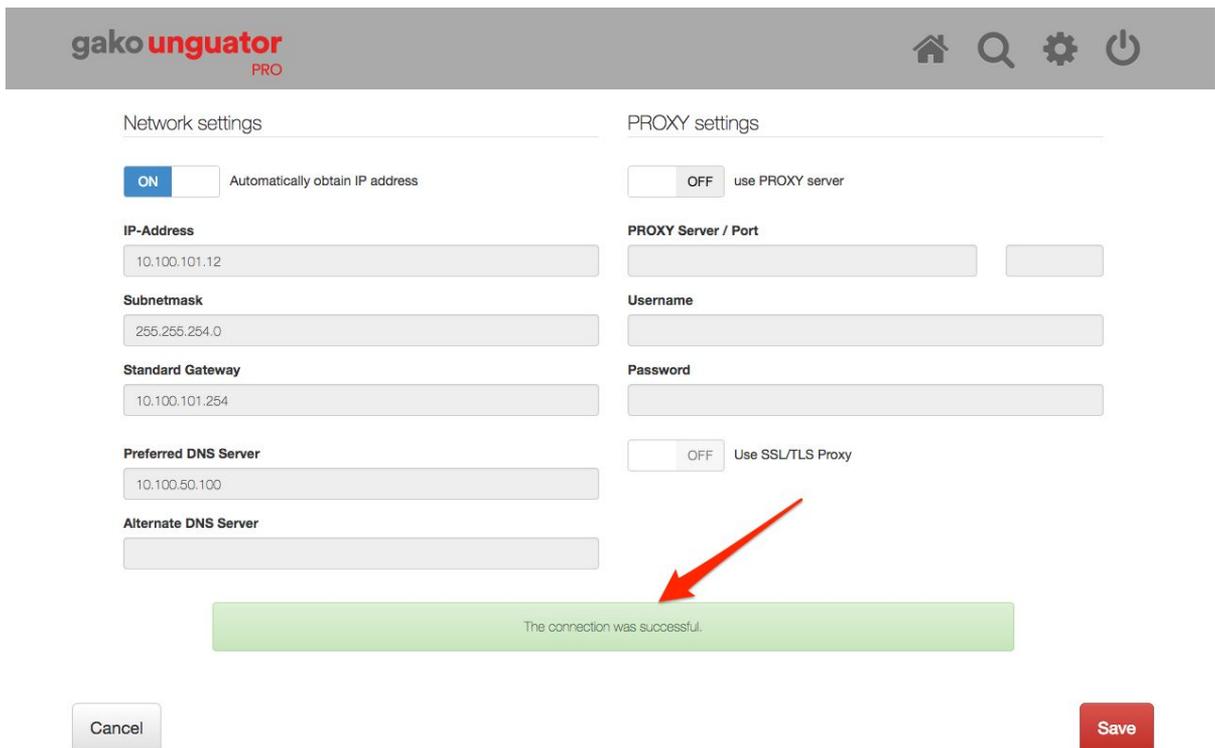

screen network setting - connection successful

4. If the the connection could not be successfully established, changes have to be made at the IP address or Proxy-Server settings. If you are not sure and do not know how, please contact your network administrator.
5. If you need a static IP address as well as other customized settings like the subnet mask and the standard gateway, turn off the button “automatically obtain IP address” and adjust the according settings:

The screenshot shows the 'gako unguator PRO' settings page. It is divided into two main sections: 'Network settings' and 'PROXY settings'. In the 'Network settings' section, the 'Automatically obtain IP address' toggle is currently turned ON, indicated by a red arrow. Below this are input fields for IP-Address (10.100.101.12), Subnetmask (255.255.254.0), Standard Gateway (10.100.101.254), Preferred DNS Server (10.100.50.100), and an empty field for Alternate DNS Server. The 'PROXY settings' section has the 'use PROXY server' toggle set to OFF, and a 'Use SSL/TLS Proxy' toggle also set to OFF. At the bottom, there is a red notification bar with the text: 'The device can not connect to the Internet, please verify the cable connection and the network settings.' There are 'Cancel' and 'Save' buttons at the bottom of the form.

Screen automatically obtain IP address

6. After confirming the changes with the save button, the changes are directly applied and tested. The notification below should change to green and display that the connections is established.
7. If the notification is still red, check the implemented changes and check those again with the save button until the settings are correct.
8. If you use a PROXY-Server in your network to connect to the internet, turn on the button “use Proxy-Server” and adjust the according settings:

gako unguator PRO

Network settings

PROXY settings

ON Automatically obtain IP address

OFF use PROXY server

IP-Address
10.100.101.12

Subnetmask
255.255.254.0

Standard Gateway
10.100.101.254

Preferred DNS Server
10.100.50.100

Alternate DNS Server

PROXY Server / Port

Username

Password

OFF Use SSL/TLS Proxy

The device can not connect to the internet, please verify the cable connection and the network settings.

Cancel Save

screen use PROXY server

9. After confirming the changes with the save button, the changes are directly applied and tested. The notification below should change to green and display that the connections is established.
10. If the notification is still red, check the implemented changes and check those again with the save button until the settings are correct.

If there is still a problem connecting your device to the internet, check again if the ethernet cable is correctly plugged in at the device and also at your network. Restart your device and your hub/switch again and check if a connection to the internet could be established via the network settings.

If further problems connecting your device with the internet are occurring, please contact your network administrator or our technical support at contact@unguator.com

For more information about your gako unguator PRO and your gako hardware visit unguator.com or at contact@unguator.com

Your gako competence center